

# STEEL DOORS

## "PRV" SERIES


### Technical details

- Heavy duty doors from the "PRV" series are available in 18, 16 and 14 gauge steel;
- These doors are designed to withstand high frequency use. They have been used in schools, hospitals, detention centres and recreational buildings;
- Using essentially the same manufacturing process as the "PS" series, these doors have vertical 20, 18 or 16 gauge steel reinforcements bonded to the door faces at every 152 mm (6") on center, or welded when a fire rated certification is required;
- The voids between the vertical reinforcements can be filled with polyisocyanurate, polystyrene, honeycomb kraft paper or a fiberglass insulating material;
- The door faces are assembled vertically one to each other by a mechanical lock seam with flush welding near the hardware perforations.


### Options

- The door faces are vertically assembled one to each other by a fully welded joint on each side and ground smooth. A 14 gauge steel vertical channel reinforcement is welded at the joint on each side to strengthen the assembly. A primer is applied all over the joint.
- These doors are also available with a fire resistance of 45, 90 or 180 min.


PRVA

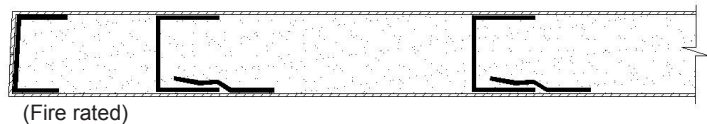


PRVB

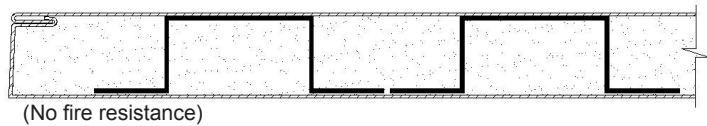

PRVC

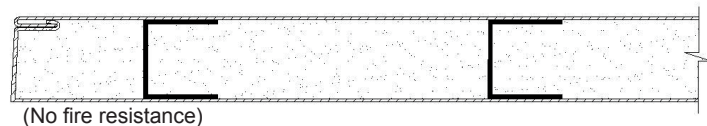

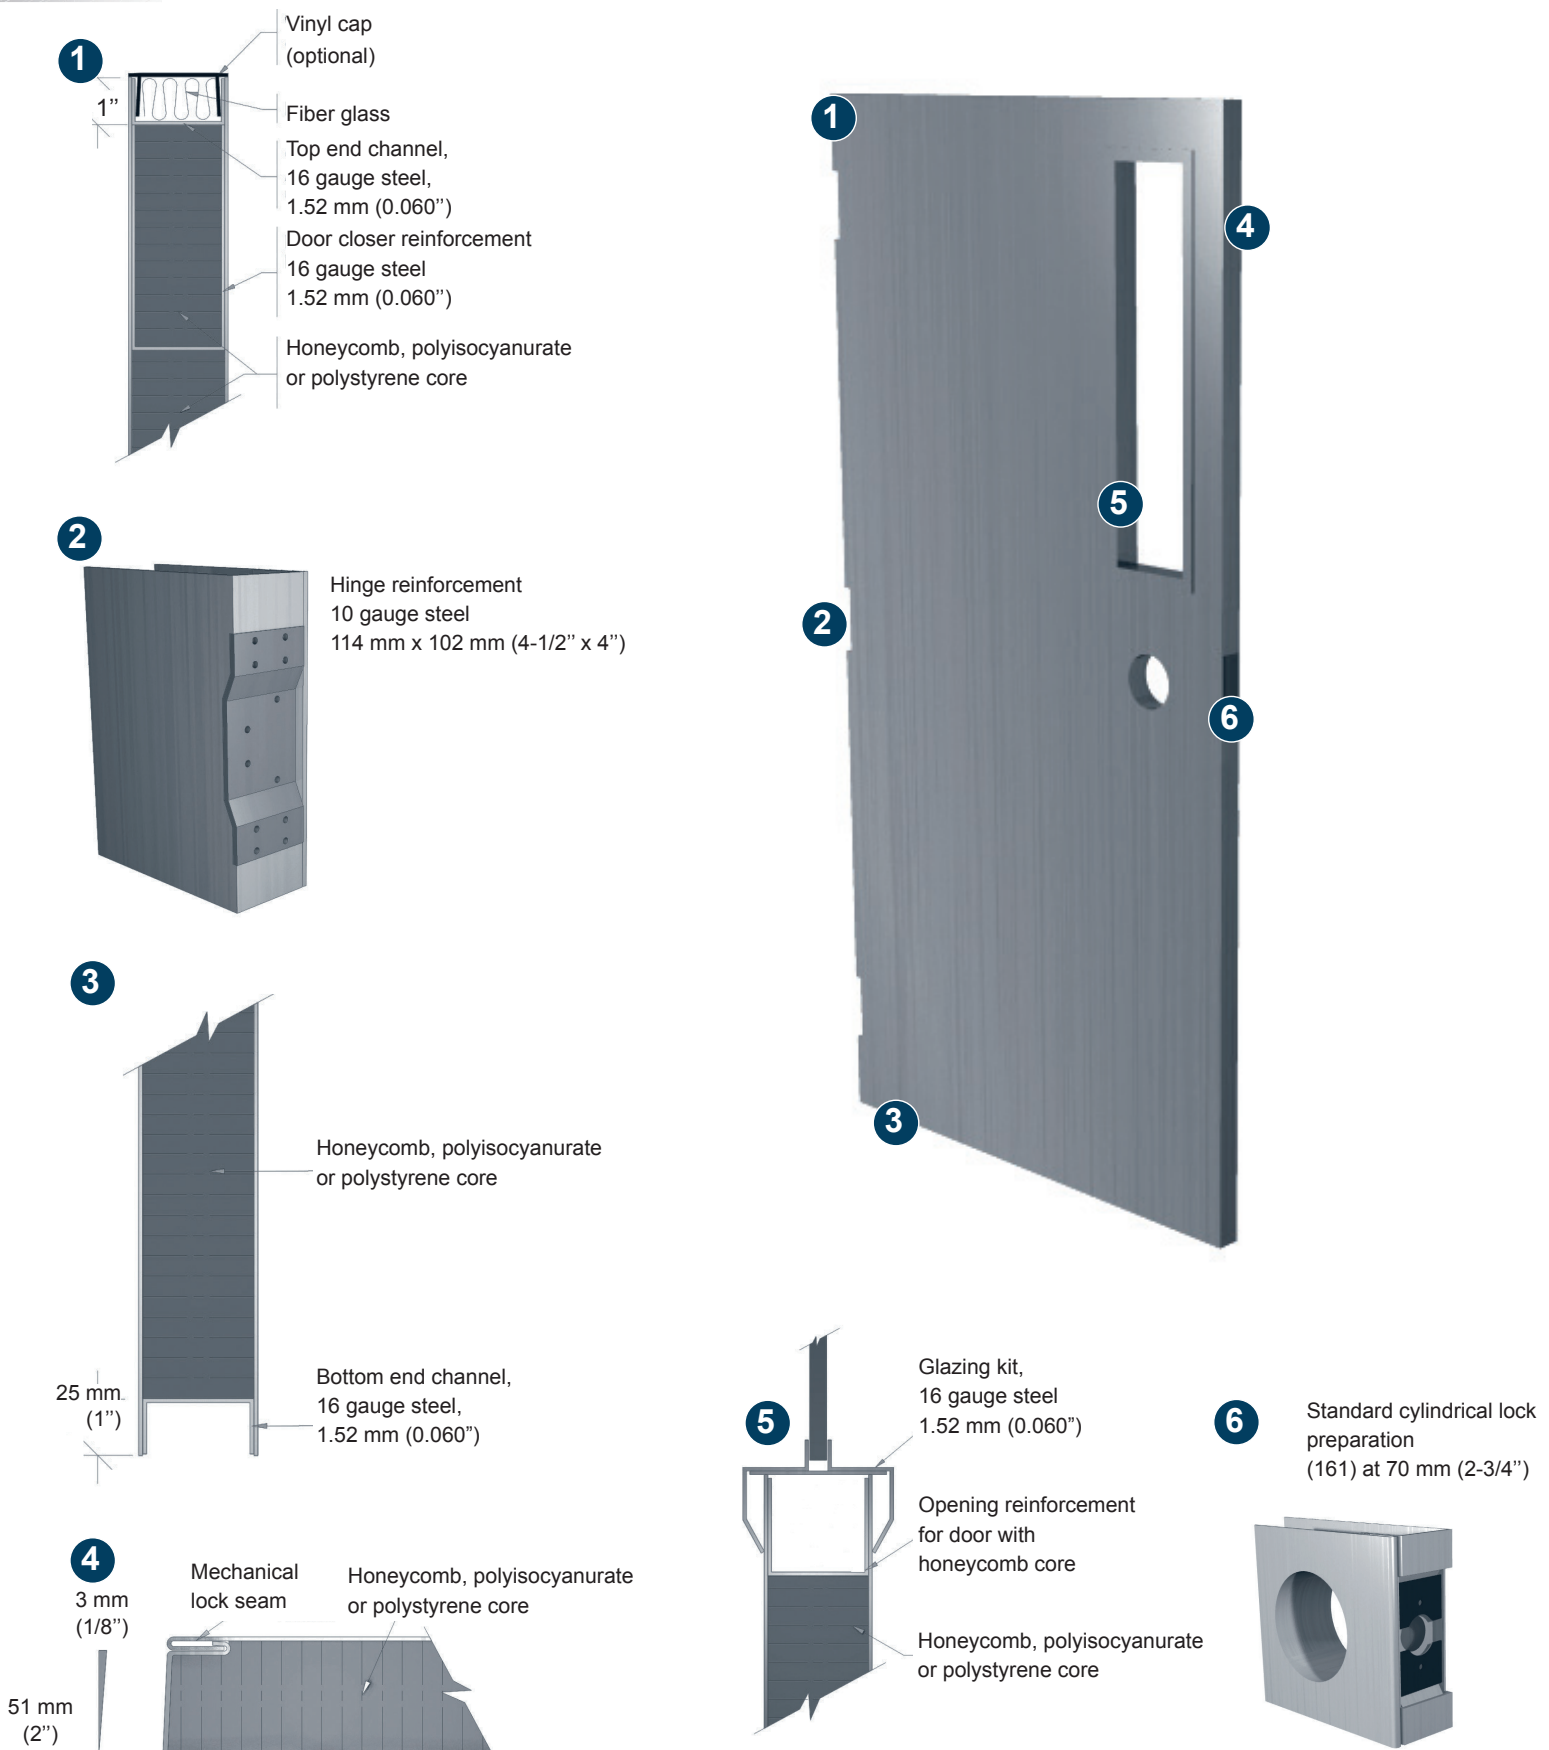

**"PCR" SERIES****Technical details**

- The doors from the "PCR" series have a temperature rise core designed to limit temperature rise on the non exposed door face, thus allowing the people being in the building to safely evacuate the area;
- The doors are designed and tested to provide a fire resistance period up to 3 hours (180 min.);
- The doors are provided with a label indicating the degree of temperature and duration of fire resistance: 250°F for 30 min. or 450°F for 60 min. (250°C for 60 min.);
- Essentially built as the "PS" series the "PCR" doors have a mineral fibre core approved by WHI laboratory. This core is laminated to the door faces by a polyurethane base adhesive.

**STEEL DOORS****Options**

- All of these designs are also available in Z275 (G90) galvanized steel;
- Vinyl caps installed at the top of the doors for exterior openings;
- Steel caps installed at the top and the bottom of the doors;
- Mechanical lock seams welded at every 152 mm (6") center to center grinded, filled with metallic paste, ground smooth and primed;
- Other hardware preparations are also available upon request.

**Glazed openings****MAXIMUM LIMITATIONS OF GLAZED OPENINGS IN FIRE DOORS**







- 180 min. fire rated door (no glazing allowed)
- 90 min. fire rated door (max. 645 cm<sup>2</sup> (100 in<sup>2</sup>) per door)
- 45 min. fire rated door (max. 8361 cm<sup>2</sup> (1296 in<sup>2</sup>) per opening and max. dimensions 54")
- Several designs of doors with glazed openings are available and Métalec offers you different trim kits:

"NL" - "LNL" - "DNL" - "HG" - "FGWR" - "VL" - "CGL" - "FG" - "JDS" - "OG" type  
(See Glazed opening types hereafter)

# STEEL DOORS








## STEEL DOORS

## Opening types

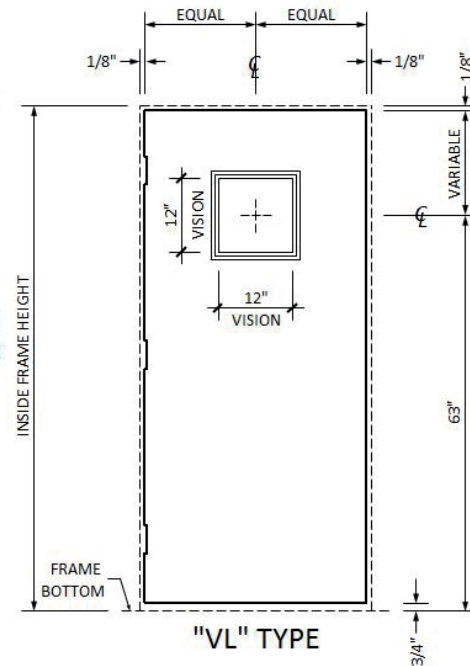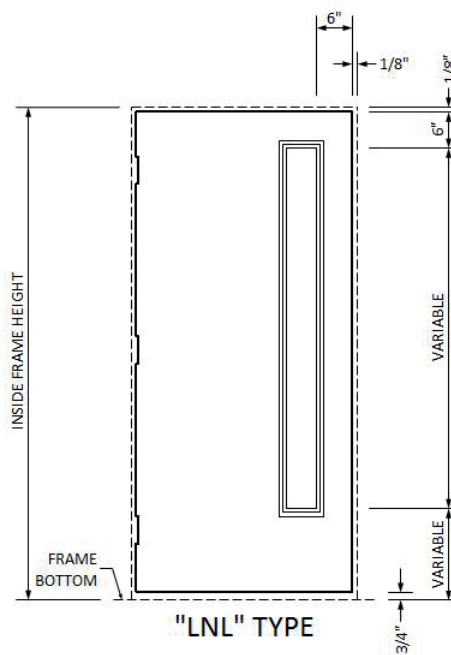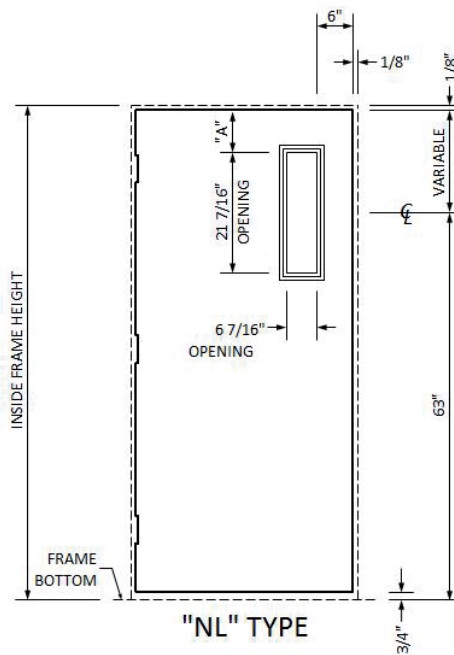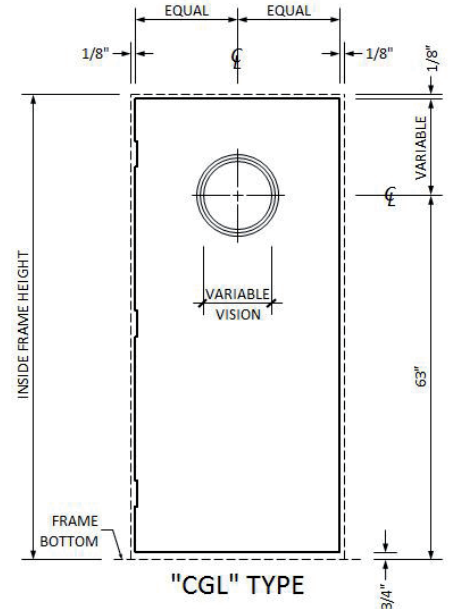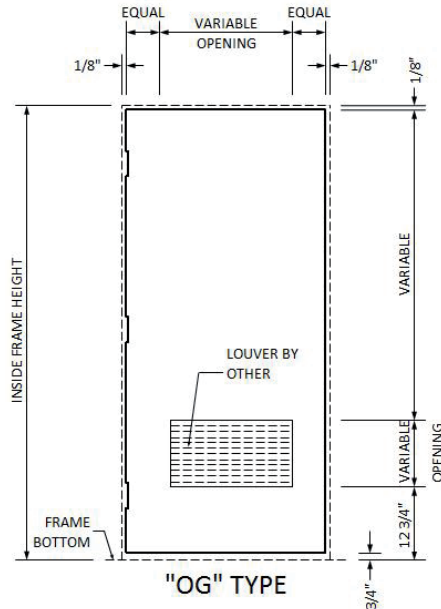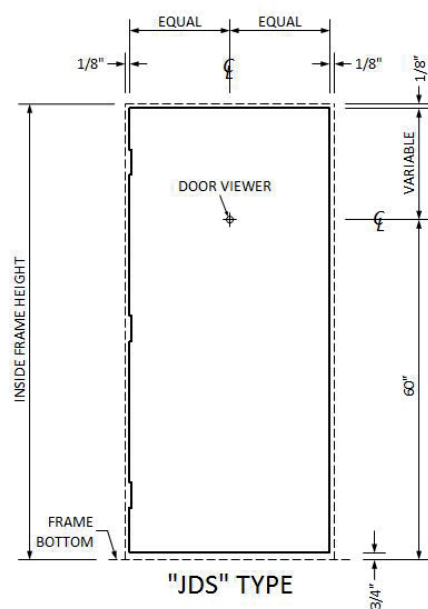

## STEEL DOORS

## Opening types (continued)

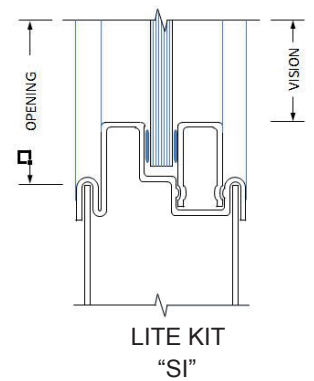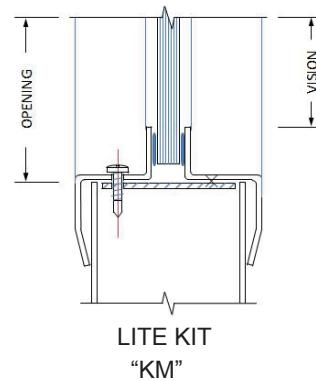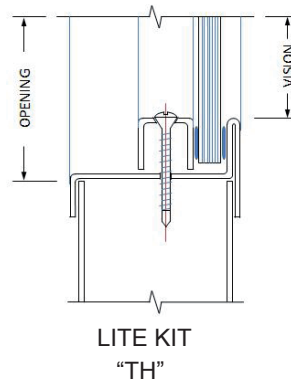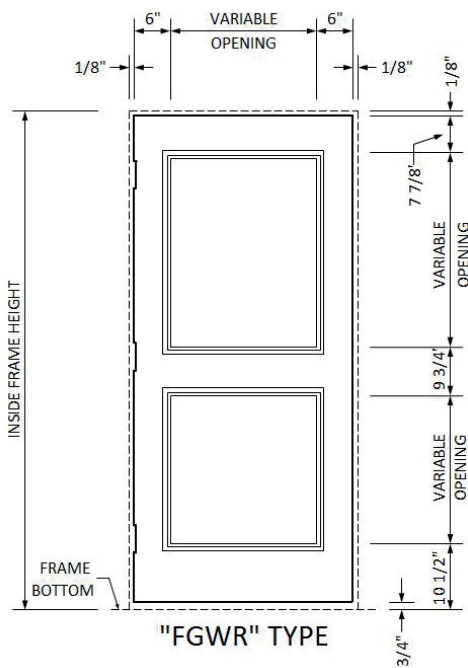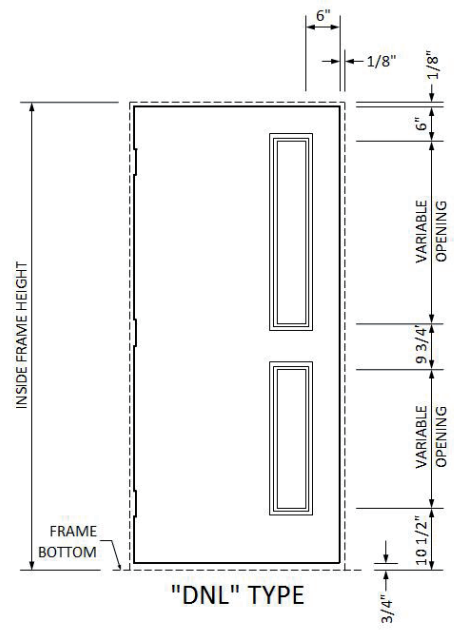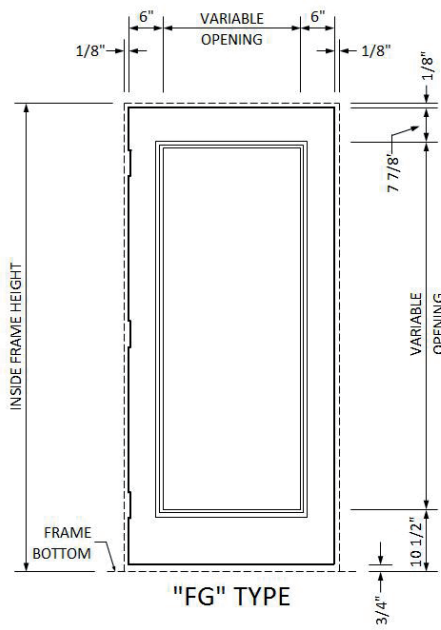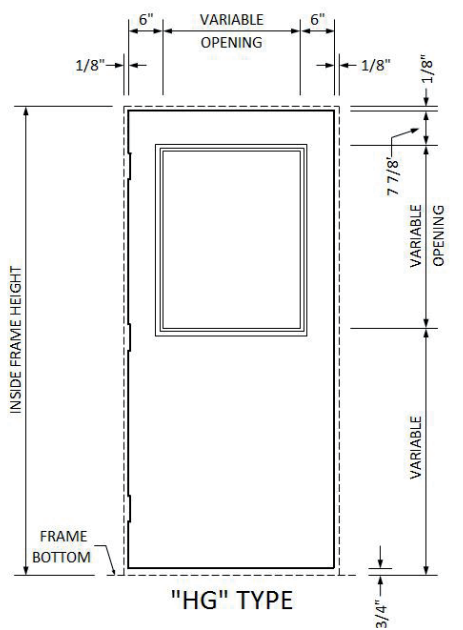

"TH" and "KM" available for 1/4" to 1" thick glass  
 "SI" available for 1/4" thick glass only